

Preliminary




N-type TOPCon

BACKSHEET MONOCRYSTALLINE MODULE

TSM-NE09RH.05 420-445W

445W / MAXIMUM POWER OUTPUT

22.3% / MAXIMUM EFFICIENCY

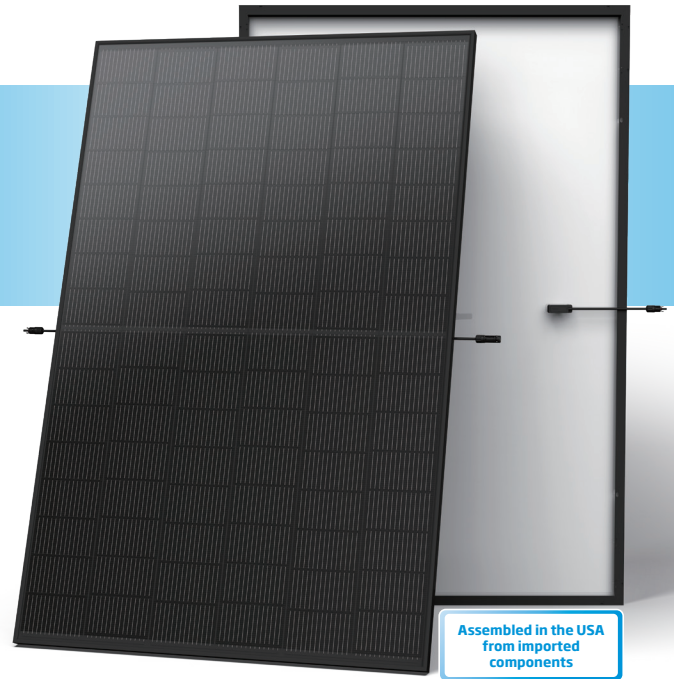

Small in size, bigger on power

- Up to 445W, 22.3% module efficiency with high density interconnect technology
- Reduce installation cost with higher power bin and efficiency
- Boost performance in warm weather with low temperature coefficient and operating temperature



High Reliability

- Innovative non-destructive cutting for improved mechanical resistance and strength
- Excellent fire rating, weather resistance, salt spray, sand dust, ammonia performance which is fully applicable in coastal, high temperature, humidity area and harsh environment



Ultra-low Degradation, higher output


- First-year degradation 1% and annual degradation at 0.4%
- Up to 25 years product warranty and 25 years power warranty



Ideal for residential and C&I rooftops

- Easy for integration, designed for compatibility with existing mainstream inverters and diverse mounting systems
- Perfect size and low weight for handling and installation
- Most valuable solution on low load capacity rooftops (weight similar to backsheet version)
- Mechanical performance more than 5400 Pa positive load and up to 5400 Pa negative load

Performance Warranty

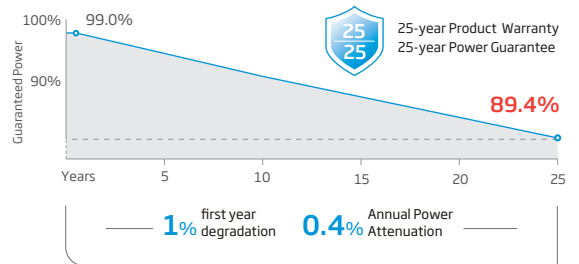

* Please refer to product warranty for details

Comprehensive Products and System Certificates

- ISO 9001: Quality Management System
- ISO 14001: Environmental Management System
- ISO14064: Greenhouse Gases Emissions Verification
- ISO45001: Occupational Health and Safety Management System



ELECTRICAL DATA (STC)

Peak Power Watts- $P_{MAX}(W_p)^*$	420	425	430	435	440	445
Power Selection (W)**	0 ~ +5					
Maximum Power Voltage- $V_{MPP}(V)$	28.3	28.5	28.8	29.1	29.3	29.5
Maximum Power Current- $I_{MPP}(A)$	14.84	14.88	14.93	14.99	15.02	15.08
Open Circuit Voltage- $V_{oc}(V)$	33.7	33.9	34.3	34.5	34.8	35.1
Short Circuit Current- $I_{sc}(A)$	15.80	15.84	15.89	15.96	16.01	16.07
Module Efficiency $\eta_m(\%)$	21.0	21.3	21.5	21.8	22.0	22.3

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%. **Power selection up to: +3%.

ELECTRICAL DATA (NOCT)

Peak Power Watts- $P_{MAX}(W_p)$	321	324	329	334	337	340
Maximum Power Voltage- $V_{MPP}(V)$	26.6	26.8	27.1	27.4	27.5	27.7
Maximum Power Current- $I_{MPP}(A)$	12.07	12.10	12.14	12.20	12.23	12.27
Open Circuit Voltage- $V_{oc}(V)$	32.1	32.3	32.6	33.0	33.2	33.5
Short Circuit Current- $I_{sc}(A)$	12.71	12.74	12.78	12.84	12.87	12.92

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P_{MAX}	-0.29% /°C
Temperature Coefficient of V_{oc}	-0.24% /°C
Temperature Coefficient of I_{sc}	0.04% /°C



Due to different testing methods, the actual performances might differ from the declared specifications.

MAXIMUM RATINGS

Operational Temperature	-40 ~ +85°C
Maximum System Voltage	1500V DC (IEC) 1500V DC (UL)
Max Series Fuse Rating	30A


CURVES OF PV MODULE

Preliminary

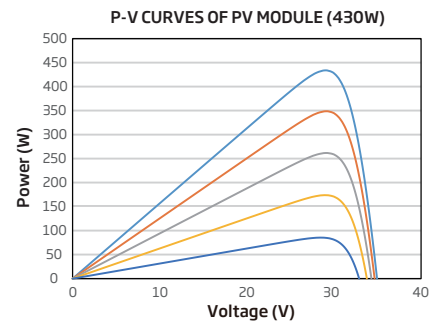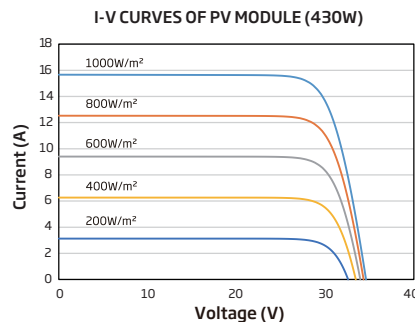
MECHANICAL DATA

Solar Cells	N-type TOPCon Monocrystalline
No. of cells	96 cells
Module Dimensions	1762×1134×35 mm (69.37×44.65×1.38 inches)
Weight	21.5 kg (47.40 lb)
Front Glass	3.2mm (0.13inches), AR Coating Tempered Glass
Backsheet	White-black Opaque Backsheet
Frame	35mm(1.38 inches) Anodized Aluminium Alloy, Black
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²) Landscape: 1100 mm/ 1100 mm (43.31/43.31 inches)
Connector	MC4 EVO2
Packaging	Modules per box: 31 pieces Modules per 53' container: 868 pieces
Fire Type	Type 1 or Type 2

*Please refer to regional datasheet for specified connector.

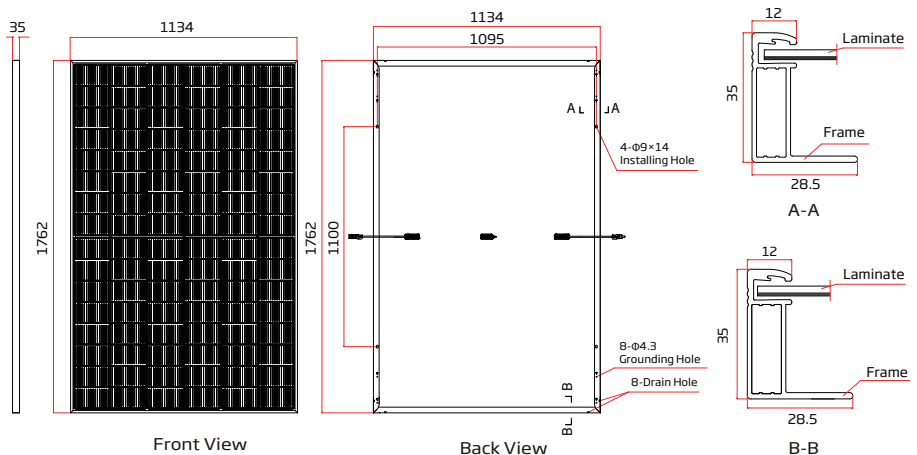

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.
© 2024 Trina Solar Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.
The right of final interpretation belongs to Trina Solar Co., Ltd.
Version number: TSM_NA_EN_2024_PA6